



CAM241L  
12V DC / 2.8-12mm Lens



## Stylish Hi-Res Traditional Camera With NiteDevil™ WDR & On Screen Display

### True Day-Night

This traditional camera has a small motorised IR filter in front of the camera element. The filter stays in place during the day filtering IR giving a true colour image. At night the filter is removed to provide high quality night vision images. Whereas regular day-night cameras have the filter in place all the time.


### 3 Easy Ways to Control the OSD

This range of cameras are really easy to set up, thanks to a choice of 3 ways to control the camera's menu.

1- If you're up a ladder to install the dome, you can quickly use the on-board joystick to access the menu and make changes on your test monitor screen.

2- A handy remote keypad is available (REM088 That can be connected anywhere along an RG59 co-ax for simple "up the co-ax".

3- Using a simple 2-wire RS485 connection you can even set up or alter the settings of the camera remotely via a DVR.

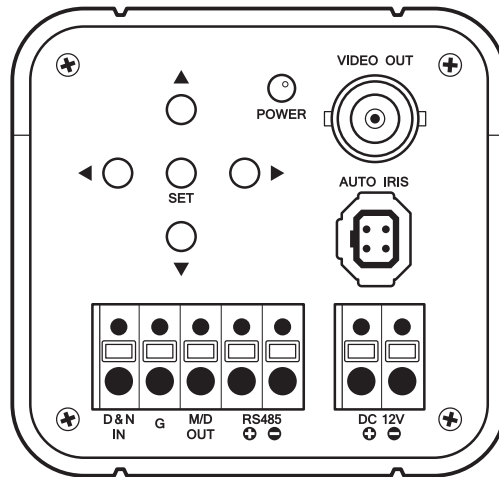

Rear Features of CAM241/CAM243

A stylish high performance NiteDevil camera in a traditional style features True Day-Night, Wide Dynamic Range and OSD Menu for mirror, privacy & motion detect functions.

Offering superb results even at night, this camera can recognize a car number plate using its built-in high sensitivity backlight compensation!

### Features

- ✓ 700TVL Col / 800TVL B&W
- ✓ 2.8-12mm Lens
- ✓ Wide Dynamic Range
- ✓ 12V DC
- ✓ 0.00019 Lux (Sens Up)
- ✓ Mirror / Privacy Function
- ✓ Motion Detect
- ✓ Up the Co-Ax and Menu Control
- ✓ True Day Night

### Specification

- 1/3 Col CCD
- 0.00019 Lux sens up
- 700 TVL Col/ 800TVL B&W
- S/N Ratio >52dB
- 1V p-p ohms
- 12VDC 140mA / 24VAC 70mA
- Auto Backlight function
- Gain Control - Switchable
- NiteDevil mode - Switchable
- Wide Dynamic Range
- OSD & Privacy Masking
- Motion Detect, Digital Zoom
- Max Size 65 x 65 x 127mm (ex lens)

### Options Available

PART CODE	DESCRIPTION
CAM241	12V DC / No Lens
CAM243	Dual Voltage / No Lens
CAM243L	Dual Voltage / 2.8-12mm Lens
CAM245	240V AC / No Lens
CAM245L	240V AC / 2.8-12mm Lens

### Other Products To Consider



UTC In-line OSD controller  
REM088

Visit the user friendly site:  
[www.nitedevil.com](http://www.nitedevil.com)



For information on "Wide Dynamic Range" see the online tip 207 at [nitedevil.com](http://nitedevil.com)

All specifications are approximate. NiteDevil.com reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, NiteDevil.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.