




**NiteDevil**  
Sees in the Dark

PTZ508K

## PTZ Turns Night into Day!

The 500 series is standard speed dome (rotating about 15°/s) and if its being used for remote monitoring purposes via broadband this can be the best choice as the slower rotation speed is easier to control remotely. With hi-speed domes that are controlled over broadband the "internet-delay" can make the dome hard to control when it's rotating a full 360° in 1 second!

**PLUS** Free Smoked Cover (clear cover supplied as standard), Free PSU + Free Ceiling Bracket with all options.

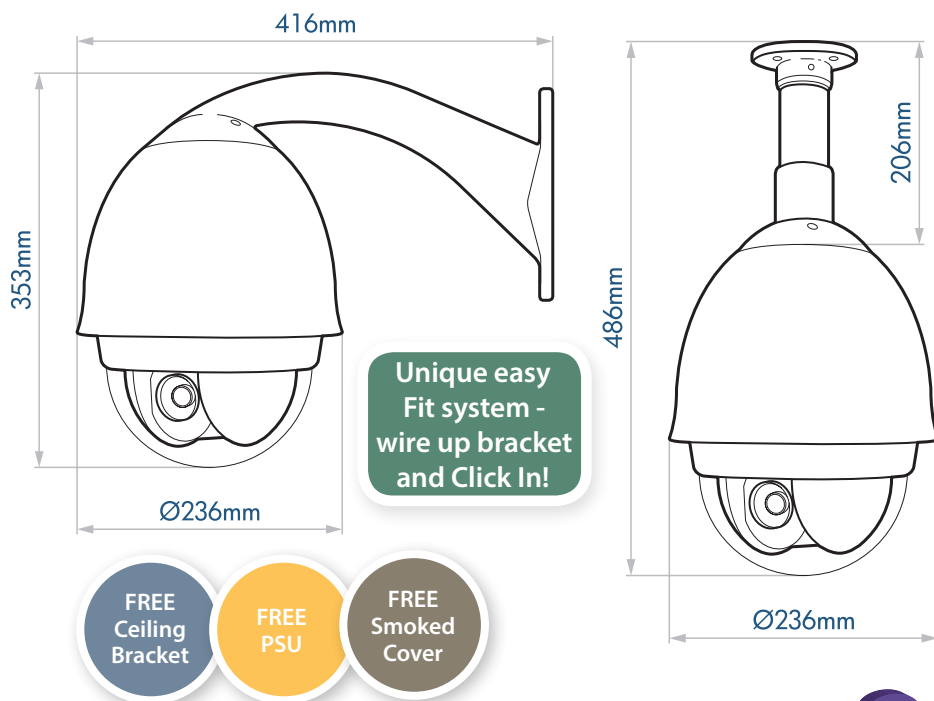

### Features

- ✓ 64 Pre-sets
- ✓ 6 Tours
- ✓ 15°/sec Pan Speed
- ✓ Multi-Protocol
- ✓ Continuous Rotation
- ✓ Double Lined, metal head
- ✓ Unique Easy Fit System
- ✓ 24V AC 1.7A
- ✓ PSU Supplied

### Specification

- 1/4" Sony Colour
- 500TVL
- 1V p-p 75 ohm
- 0.001 Lux
- Day/Night Function
- 24V AC
- 1.7 Amp
- IP66
- Pelco P & D
- Bracket Supplied
- Metal Construction
- 27 x IR sensitive Zoom
- 64 Presets
- 6 Tours
- 15°sec Pan speed
- H353mm x Ø 236mm x 416mm from wall

### Options Available

PART CODE	DESCRIPTION
PTZ505K	500TVL 27x Zoom Silver
PTZ505P	540TVL 36x Zoom WDR Silver
PTZ508K	500TVL 27x Zoom Ivory
PTZ508P	540TVL 36x Zoom WDR Ivory

### Other Products To Consider



Ext. Corner bracket  
PTZ604

Visit the user friendly site:  
[www.nitedevil.com](http://www.nitedevil.com)

Find out "How to control multiple PTZ domes."  
See the online tip 200 at [nitedevil.com](http://nitedevil.com) ▶▶▶



All specifications are approximate. NiteDevil.com reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, NiteDevil.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.